

NTG4+

Directional Condenser Microphone
指向性枪式话筒


AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664




Frequency response


FLAT

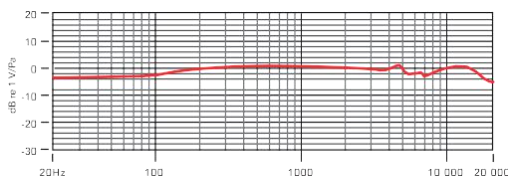

HIGH BOOST

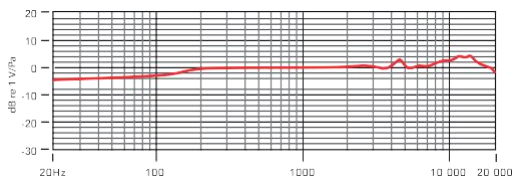

HIGH PASS

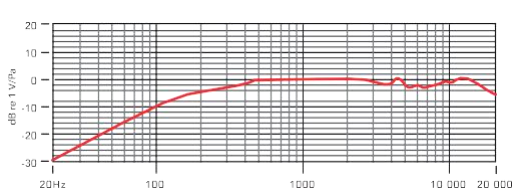

Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Internal rechargeable battery with 150 hours operation
- High Frequency Boost
- High Pass Filter (0Hz/75Hz)
- PAD (-10db)
- Designed and manufactured in Australia
- Full 10 year warranty (with online registration)


Incl. accessories

- RM5 MicClip
- Foam Windshield
- ZP1 Pouch
- Micro USB

Specifications

Acoustic Principle	Line Gradient
Directional Pattern	Super-Cardioid
Frequency Range	20Hz ~ 20,000Hz (selectable HPF @ 75Hz)
Sensitivity	-32dB re 1V/Pa (25mV @ 94dB SPL) ±2dB @ 1kHz.
Output Impedance	200Ω
Equivalent Noise	16dBA SPL (per IEC651)
Maximum Output	7dBu (@ 1kHz, 1% THD into 1kΩ)
Dynamic Range	119dB (per IEC651)
Maximum SPL	135dB
Signal to Noise Ratio	78dB SPL (per IEC651)
Power Req.	48V Phantom Power (4.8mA current draw) or internal rechargeable lithium battery.
Battery Charger	MicroUSB cable (supplied)
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Dimensions	22 x 278mm
Net Weight	176g

Polar pattern

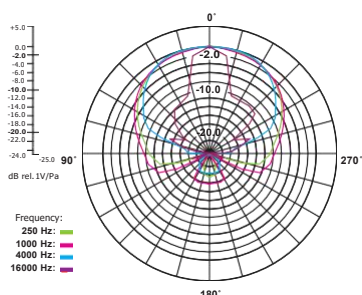

RØDE
MICROPHONES

Features 特点

- Broadcast sound quality 广播级声音质量
- Low noise circuitry 低噪音电路
- Condenser transducer 电容换能器
- Rugged metal construction 坚固的金属结构
- Internal rechargeable battery with 150 hours operation 内置可充电电池，可运行150小时
- High Frequency Boost 高频提升
- High Pass Filter (0Hz/75Hz) 高通滤波器(0Hz/75Hz)
- PAD (-10db) PAD (-10db)
- Designed and manufactured in Australia 在澳大利亚设计和制造
- Full 10 year warranty (with online registration) 完整的10年质保(需在线注册)

Specifications 规格

Acoustic Principle 声学原理	Line Gradient 线梯度
Directional Pattern 指向性模式	Super-Cardio 超级心形拾音模式
Frequency Range 频率范围	20Hz ~ 20,000Hz (select able 可选择 HPF @ 75Hz)
Sensitivity 敏感度	-32dB re 1V/Pa (25mV @ 94db SPL) ±2dB @ 1kHz.
Output Impedance 输出阻抗	200Ω
Equivalent Noise 等效噪音	16dBA SPL (per IEC651)
Maximum Output 最大输出	7dBu (@ 1kHz, 1% THD into 1kΩ)
Dynamic Range 动态范围	119dB (per IEC651)
Maximum SPL 最大声压级	135dB
Signal to Noise Ratio 信号噪声比	78dB SPL (per IEC651)
Power Req. 所需功率	48V Phantom Power 幻想电源 (4.8mA current draw 电流消耗) or internal rechargeable lithium battery. 内置可充电的锂电池
Battery Charger 电池转换器	Micro USB cable (supplied) 电缆 (提供)
Output Connection 输出连接	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) 3针XLR与第2针 (+)、第3针 (-) 和第1针 (接地) 之间的平衡输出
Dimensions 尺寸规格 (毫米)	22 x 278mm
Net Weight 净重 (克)	176g