




PM-2

Small Diaphragm Cardioid Condenser Microphones

声学配对小震膜心形指向对装电容麦克风

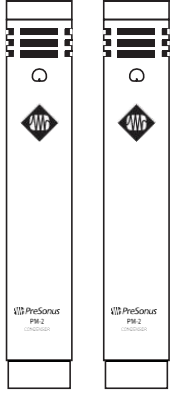

Key Features

- Two (2) matched small-diaphragm condenser microphones
- Cardioid polar pattern
- The right choice for stereo recordings of acoustic instruments, drum overheads, ensembles and more
- Sold as a sonically matched pair
- 3/4-inch (19 mm), gold-sputtered capsule
- Ultra light chassis for easy positioning
- Mic clips and stereo bar for XY mic placement included

主要特点:

- 两个匹配的小振膜电容式麦克风
- 心形极性模式
- 是原声乐器、鼓声、合奏等立体声录音的最佳选择。
- 以一对音质匹配的方式出售
- 3/4英寸（19毫米），金溅射麦克风头
- 超轻的底盘，便于定位
- 包括麦克风夹和用于XY麦克风放置的立体声杆

Sonically matched for precise stereo imaging

为精确的立体声成像进行声学匹配


Ideal for stereo recordings of acoustic instruments, drum overheads, ensembles and more, the PreSonus PM-2 stereo microphone set provides the tools you need to create professional results. Each PreSonus PM-2 small-diaphragm cardioid condenser microphone is equipped with a 3/4" gold-sputtered capsule housed in an ultra-light chassis, making it easier to perfectly position your microphones without fighting gravity. Sold as a sonically matched pair, the PM-2 comes equipped with a stereo bar for XY mic placement. PM-2 microphones can be used together or individually, making them an excellent addition for any home or professional recording environment.

PreSonus PM-2 立体声麦克风组是原声乐器、架子鼓、合奏等立体声录音的理想选择，为您提供了创造专业效果所需的工具。每个PreSonus PM-2 小振膜心形电容麦克风都配备了一个3/4" 金溅射麦克风头，装在一个超轻的底盘上，更容易完美地定位你的麦克风，而不需要对抗重力。PM-2 作为一对音质匹配的方式出售，配备了用于XY麦克风放置的立体声棒。PM-2 麦克风可以一起使用或单独使用，使它们成为任何家庭或专业录音环境的绝佳的增添。

Technical specifications 技术规格

Capsule Type	19 mm, gold sputtered 6 micron Mylar, small-diaphragm condenser
Preamp Type	Class A FET
Sensitivity	8 mV/Pa
Frequency Response	40 Hz to 18 kHz
Polar Pattern	Cardioid
Equivalent Noise Level	22 dB SPL A-wtd
Maximum SPL	135 dB
Total Load Impedance	>1 kΩ
Output Impedance	200Ω
Powered By	48V Phantom Power

Frequency response 频率响应

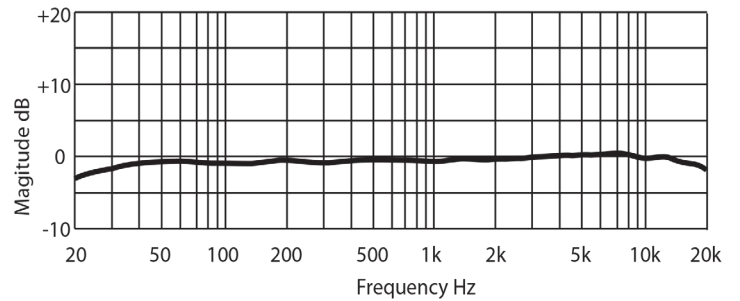

Polar pattern 极性模式

